
Continuous and Stop Hinges

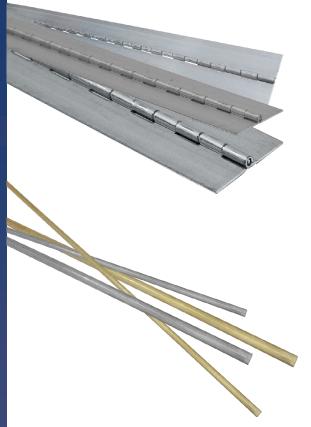

Pre-plated Electro-Galvanized Hinges

Galvanized Pins - No Staking - No Holes - Degreased

Part Number	Material Thickness	Open Width	Pin Diameter	Knuckle Length	Length
G41595	.040	1.50	.091	1/2	72.00
G42095	.040	2.00	.091	1/2	72.00
G61515	.060	1.50	.120	1/2	72.00
G62015‡	.060	2.00	.120	1/2	72.00
G63015	.060	3.00	.120	1/2	72.00

[‡] this hinge is non-stock

Pins for Continuous Hinges

Part Number	Material	Pin Diameter	Length	
091X72B	brass	.091	72.00	
091X72SS	304SS	.091	72.00	
120X72B	brass	.120	72.00	
120X72SS	304SS	.120	72.00	
187X72B	brass	.187	72.00	
187X72SS	304SS	.187	72.00	
250X72B	brass	.250	72.00	
250X72SS	304SS	.250	72.00	
375X72B	brass	.375	72.00	
375X72SS	304SS	.375	72.00	
500X72B	brass	.500	72.00	
500X72SS	304SS	.500	72.00	


[•] custom lengths available

Continuous Stop Hinges


Stock Item

Part Number	Material Thickness	Open Width	Pin Diameter	Knuckle Length	Stop Specifications	Length
CS1050	.035 Steel	1.060	.086 steel	1/4	outside stop 90° ±3°	72.00

[▶] inside stop hinges are special order items



outside stop hinges normally operate from the 180° or flat, open position, stopping at a specific angle plus or minus 3°.



 $inside\ stop\ hinges\ normally\ operate\ from\ the\ 0^\circ\ or\ closed\ position,\ stopping\ at\ a\ specific\ angle\ plus\ or\ minus\ 3^\circ.$