


Tie Downs

Part Number	Material	Finish	WLL (lbs.)	UBS (lbs.)
860	steel	zinc plated	500	1,500
860SS	304SS	electropolished	1,000	3,000


- ▶ $\varnothing.236$ [6.00] steel D-ring
- ▶ .074 [1.88] thick D-ring holder
- ▶ parts shipped unassembled inside a sealed polybag

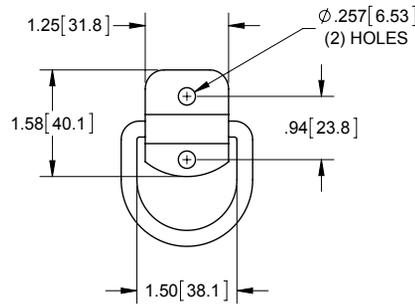

Tie Down

Part Number	Material	Finish	WLL (lbs.)	UBS (lbs.)
859	steel	zinc plated	2,500	8,000


- ▶ $\varnothing.375$ [9.53] steel D-ring
- ▶ .135 [3.43] thick D-ring holder
- ▶ part shipped unassembled inside a sealed polybag

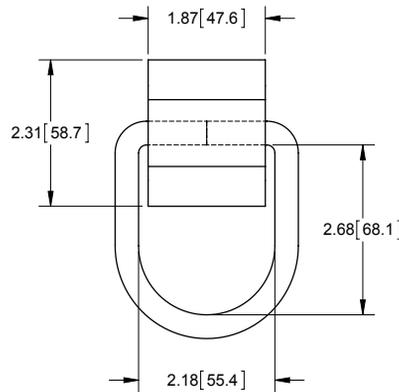

Tie Down Ring

Part Number	Material	Finish	WLL (lbs.)	UBS (lbs.)
851BK02	steel	black e-coat	130	400

- ▶ integrated silicon insert for noise, vibration, and rattle reduction
- ▶ D-ring holds any desired position for one-handed operation while securing tie-down
- ▶ intended for light duty cargo restraint
- ▶ M6 or 1/4" mounting fastener not supplied

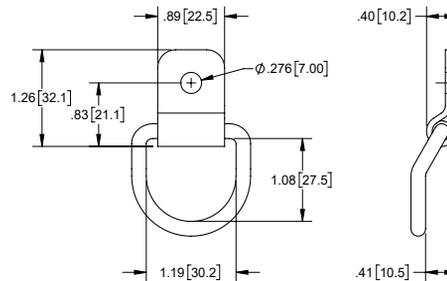

Tie Downs

Part Number	Material	Finish	WLL (lbs.)	UBS (lbs.)
861	steel	zinc plated	1,200	3,600
861SS	304SS	electropolished	1,200	3,600

- ▶ $\varnothing.236$ [6.00] steel D-ring
- ▶ .138 [3.50] thick D-ring holder
- ▶ parts shipped unassembled inside a sealed polybag

